





Safe and easy to use, this is Japan's standard model



Function
























Features

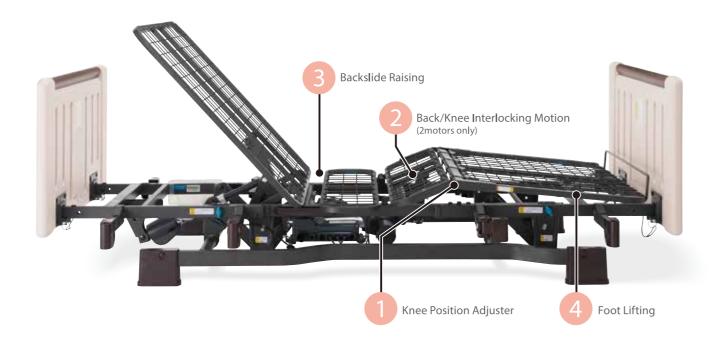

Knee position adjuster to reduce slippage during reclining






Miolet II's motor is quiet and water resistant (IPX4)*
* IPX4 indicates the waterproof protection standard again spraying water at all angles







Easily adjustable just by pulling off and sliding the pin

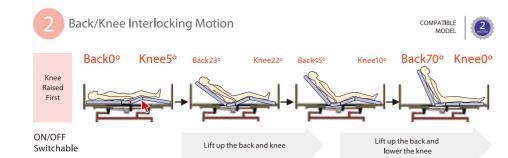


Backslide Raising




Swollen reduction by foot lifting function





Universal Design Control Switch

Easy to Hold and Use Universal Design Control Switch

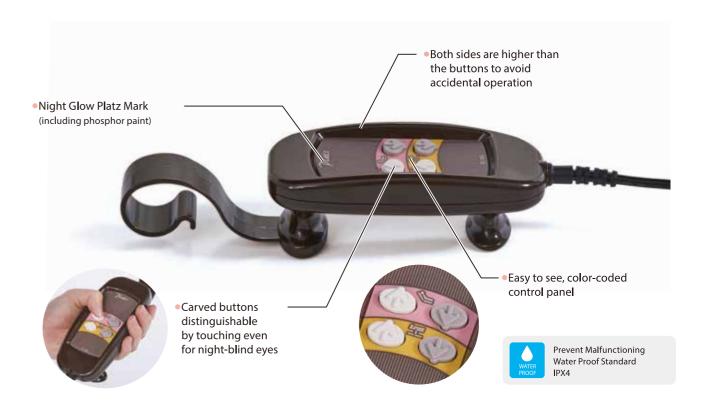







Does not interfere with transferring to a wheelchair



Easy to hang on the side rails





Unique Japan-made with Delicate Care

Unique Japan-made with delicate care reduces the burden of users and caregivers





If the rail holder is retractable, a wheelchair can be placed close to the bed and the patient can easily move from bed to the wheelchair

EB Coating






"EB Coating Layer" The strong protective coating is resistant to UV rays, scratches, and grime

"Transparent Emboss and Olefin Film" Creates $wood\hbox{--like surface with the bumpy texture of }wood$

"Printed Grain Pattern" A tree-like design

"Colored Base / Olefin film"

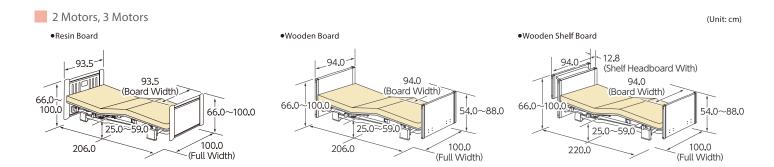

^{*} Full width when using rail holder is 100.0cm

^{* 8}cm or over space at leg side and 1cm or over space at head side is necessary because the bed is moving up and down in arc

				2 Motors	3 Motors	
Suitable Mattress Size				Length: 190.0 - 192.0cm, Width: 88.0 - 91.0cm Thickness: Max 18.0cm to Min 7.0cm		
Weight	Resin Board		Regular Size	77.0kg	78.0kg	
	Wooden Board		Regular Size	81.0kg	82.0kg	
	Wooden Shelf Board		Regular Size	89.5kg	90.5kg	
Packing				5		
Material				Frame: Steel, ABS, PP / Resin Board: PE / Wooden Board: MDF Olefin board, Natural woods		
Angle Adjustment		Back Angle		0 - 70°		
		Knee Angle		0 - 22°	0 - 18°	
Bottom Height			t	25.0 - 59.0cm With height raiser (PC501-FU45): +4.5cm With caster (PC503-8CK1): +3.5cm		
Volt	tage	Type-A		100VAC (50/60Hz)		
(Electric	city Type)		Туре-В	230VAC (50/60Hz)	
Power Consumption			ion	100W		
Motor				Denmark LINAK		
Maximum Load Capacity for User's Weight				138kg / Safe load capacity: 174kg(1700N)		
Country of Manufacture			cture	Vietnam		

Optional Parts



PC501-FU45

Miolet ForU, Miolet II 45mm height raiser (4pcs) Material: PP Height in usage: +4.5cm



PC503-8CK1

Miolet II Caster (4pcs) Material: Nylon, Polyurethane, Steel, ABS Height when using caster: +3.5cm

*4 pcs: 2 with stopper and 2 without stopper





PE501-D40 Control Switch Holder Material: PP Dimension: length 21.7cm x width 7.6cm x height 5.3cm Weight: 60g





Usage Example

PE500-A4050 Air Mattress Hanger Material: (Bar)POM, (Hook)ABS Dimension: length 33.5cm x width 10.5cm x height 12.5cm Weight: 420g Withstand load: 10kg