

Low-Floor Electric Bed for Care Facility with High Reputation for Its Knee Area and Lifting Motion



Dark Brown (DB)



Light Brown (LB)



Fixed Leg Type

Patent No. 5089786
(Control Switch Shape)

Function

2 Motors



BACK RAISING
70°



BACK & KNEE
70°/22°



HEIGHT
ADJUSTABLE



3 Motors



BACK RAISING
70°



BACK & KNEE
70°/17°



KNEE RAISING
17°





HEIGHT
ADJUSTABLE




Features


Knee position adjuster to reduce slippage during reclining

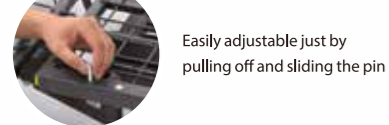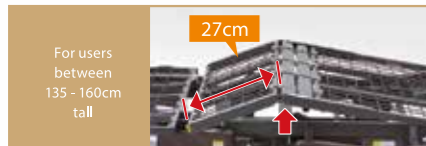


Back/Knee Interlocking Motion

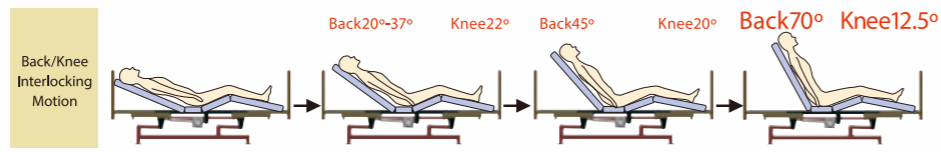


The angle between the back and knees is maintained at over 100 degrees to ensure the abdominal area is not compressed.

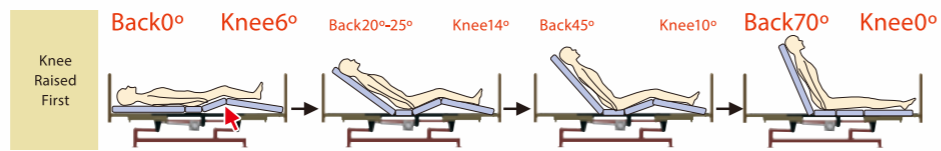

Backslide Raising

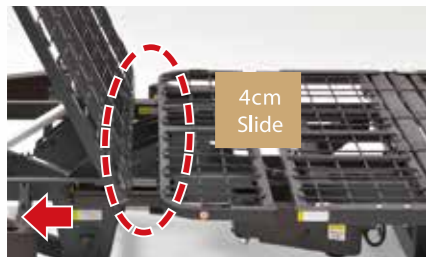

Retractable Center Rail Holder

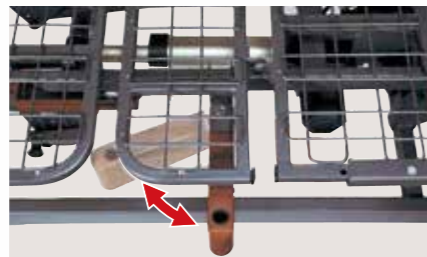

Double Lock Casters (4pcs with locking brake)



Equipped with Highly-Functional Motor from LINAK in Denmark



Ultilet's motor is quiet and water resistant (IPX4)*

* IPX4 indicates the waterproof protection standard against spraying water at all angles

Universal Design Control Switch



Easy to Hold and Use Universal Design Control Switch

Night Glow Platz Mark (including phosphor paint)

Both sides are higher than the buttons to avoid accidental operation

Carved buttons distinguishable by touching even for night-blind eyes

Easy to see, color-coded control panel

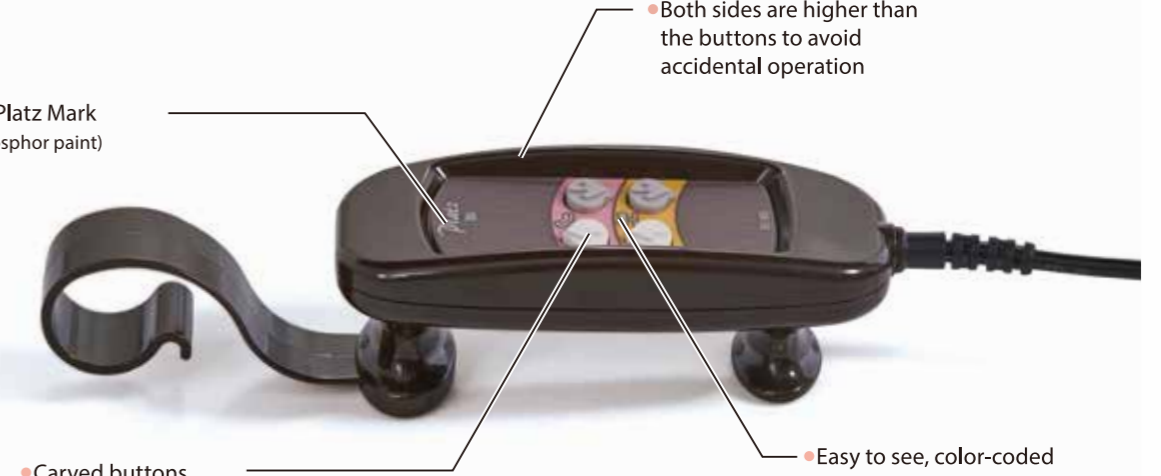

Easy to operate with a weak grip




Easy to hang on the side rails



Specifications

2 Motors, 3 Motors (Unit: cm)

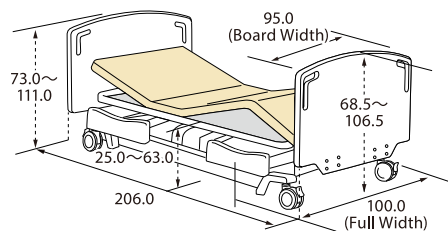

*Full width when using center rail holder is 103.5cm
 *7cm or over space at leg side and 5cm or over space at head side is necessary because the bed is moving up and down in arc.

		2 Motors	3 Motors
Suitable Mattress Size		Length: 190.0 - 193.0cm, Width: 88.0 - 91.0cm Thickness: Max 18.0cm to Min 7.0cm	
Weight (of caster leg model)		95.0kg (95.5kg)	98.0kg (98.5kg)
Packing		4 (caster model: 5)	
Material		Frame: Steel, ABS Head & Footboard: Decorative Paper Board, PU Coating	
Angle Adjustment	Back Angle	0 - 70°	
	Knee Angle	0 - 22°	0 - 17°
Bottom Height		25.0 - 63.0cm	
Voltage (Electricity Type)	Type-A	100VAC (50/60Hz)	
	Type-B	230VAC (50/60Hz)	
Power Consumption		90W	
Motor		Denmark LINAK	
Maximum Load Capacity for User's Weight		138kg / Safe load capacity: 174kg (1700N)	
Country of Manufacture		Frame: Vietnam, Wooden parts: China, Vietnam	

Optional Parts



Extension Legs for Ultilet

- **PDP-140G**
14cm extension legs for height adjustment (4pcs)
- **PDP-70G**
7cm extension legs for height adjustment (4pcs)
- **PDP-35G**
3.5cm extension legs for height adjustment (4pcs)



Dark Brown (DB)
Ultilet with Accessories